

## Solar inverters

# ABB string inverters UNO-7.6/8.6-TL-OUTD 7.6kW to 8.6kW



**UNO 7.6 and 8.6 is a feature-rich transformerless inverter that is powerful and flexible enough to operate like two inverters. This means fewer inverters are needed to fit residential installations.**

### Reducing cost of installation.

Available in 7.6kW or 8.6kW, the ABB UNO 7.6 and 8.6 inverters are well suited for North American residential rooftop installations and provide the system flexibility, levels of performance and reliability that designers need. The wide input voltage range makes the inverter suitable for installations utilizing a reduced string size.

**ABB is the only manufacturer who can offer a fully-loaded, large-residential system using one inverter.**

ABB's high speed and precise Multiple Power Point Tracker (MPPT) algorithm enables real-time power tracking and improved energy harvesting.

The dual MPPT input enables more orientations of PV strings to be connected at the same time; thereby, maximizing the energy harvesting and flexibility.

These inverters are extremely lightweight and simple to wall mount, while still featuring an integrated DC disconnect with combiner, lowering overall installation cost.

### Highlights:

- Dual independent MPPT channel compatible with a 40Amp residential panel sized breaker.
- Outdoor NEMA 4X rated enclosure for unrestricted use under any environmental conditions.
- Wide input range for increased stringing flexibility.
- Minimizes installation space with side-by-side installation
- 96.5% CEC efficiency.

Power and productivity  
for a better world™



### Additional highlights:




- It has a single phase and split phase output.
- It offers an extra quiet, high-frequency transformer inverter architecture.
- This fully inverter-integrated DC disconnect and wiring box saves installation time and cost.
- It has flexible data monitoring options to view inverter performance where and how you need it.
- This inverter comes with a standard 10 year warranty, available extensions to 15 and 20 years.



### Technical data and types

Type code	UNO-7.6-TL-OUTD-S-US-A			UNO-8.6-TL-OUTD-S-US-A	
Nominal output power	7600W			8600W	
Maximum output power	8300W			9400W	
Rated grid AC voltage	208V	240V	277V	240V	277V
<b>Input side</b>					
Number of independent MPPT channels	2				
Maximum usable power for each channel	5400W				
Absolute maximum voltage (Vmax)	600V				
Start-up voltage (Vstart)	200V (adj. 120-350V)				
Full power MPPT voltage range	200-480				
Operating MPPT voltage range	0.7xVstart-580 (≥ 90V)				
Maximum current (I <sub>dcmax</sub> ) for both MPPT in parallel	48A				
Maximum usable current per channel	24A				
Maximum short circuit current limit per channel	30A				
Number of wire landing terminals per channel	2 pairs				
Array wiring termination	Terminal block, pressure clamp, AWG12-AWG4				
<b>Output side</b>					
Grid connection type	1Ø/2W	Split-Ø/3W	1Ø/2W	Split-Ø/3W	1Ø/2W
Grid voltage range (V <sub>min</sub> -V <sub>max</sub> )	183V-228V	211V-264V	244V-304V	211V-264V	244V-304V
Nominal grid frequency	60Hz				
Adjustable grid frequency range	57Hz-63Hz				
Maximum Current (I <sub>acmax</sub> )	36.5A <sub>RMS</sub>	32A <sub>RMS</sub>	27.5A <sub>RMS</sub>	36A <sub>RMS</sub>	31A <sub>RMS</sub>
Power Factor	>0.995(adj. ±0.9, or fixed to ± 0.8 with max 7.6kVA / 8.6kVA)				
Total harmonic distortion (@ rated output power)	<2%				
Grid wiring termination type	Terminal block, pressure clamp AWG10-AWG4				
<b>Input protection devices</b>					
Reverse polarity protection	Yes				
Over-voltage protection type	Varistor, 2 for each channel				
PV array ground fault detection	Pre start-up Riso and dynamic GFDI (requires floating arrays)				
<b>Output protection devices</b>					
Anti-islanding protection	Meets UL 1741/IEEE 1547 requirements				
External AC OCPD rating	50A <sub>RMS</sub>	40A <sub>RMS</sub>	40A <sub>RMS</sub>	50A <sub>RMS</sub>	40A <sub>RMS</sub>
Over-Voltage protection type	Varistor, 2 (L <sub>1</sub> - L <sub>2</sub> / L <sub>1</sub> - G)				
<b>Efficiency</b>					
Maximum efficiency	97.5%				
CEC efficiency	96.5%				
<b>Operating performance</b>					
Night time consumption	<0.6 W <sub>RMS</sub>				
Stand by consumption	< 8 W <sub>RMS</sub>				
<b>Communication</b>					
User-interface	5.5" x 1.25" Graphic display				
Remote monitoring (1xRS485 included)	VSN700 Data Logger (opt.)				
<b>Environmental</b>					
Ambient air operating temperature range	-13°F to 140°F (-25°C to +60°C) with derating above 122°F (50°C)				
Ambient air storage temperature range	-40°F to 176°F (-40°C to +80°C)				
Relative humidity	0-100% condensing				
Acoustic noise emission level	<50 db (A) @ 1m				
Maximum operating altitude without derating	6560ft (2000m)				

## Block diagram of UNO-7.6/8.6-TL-OUTD

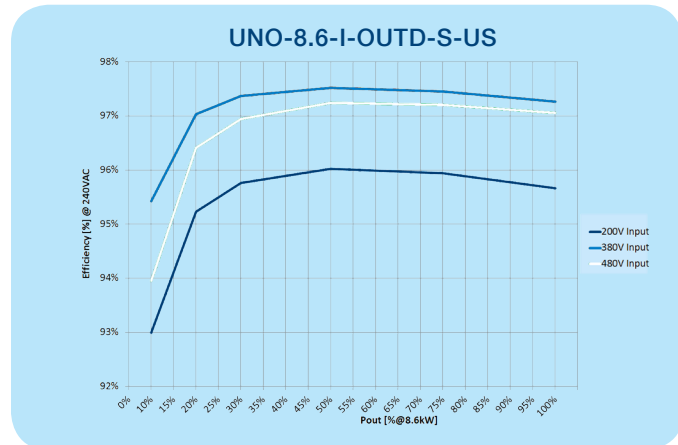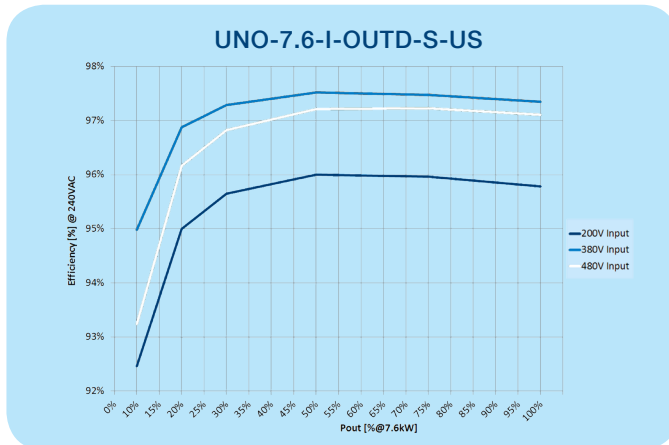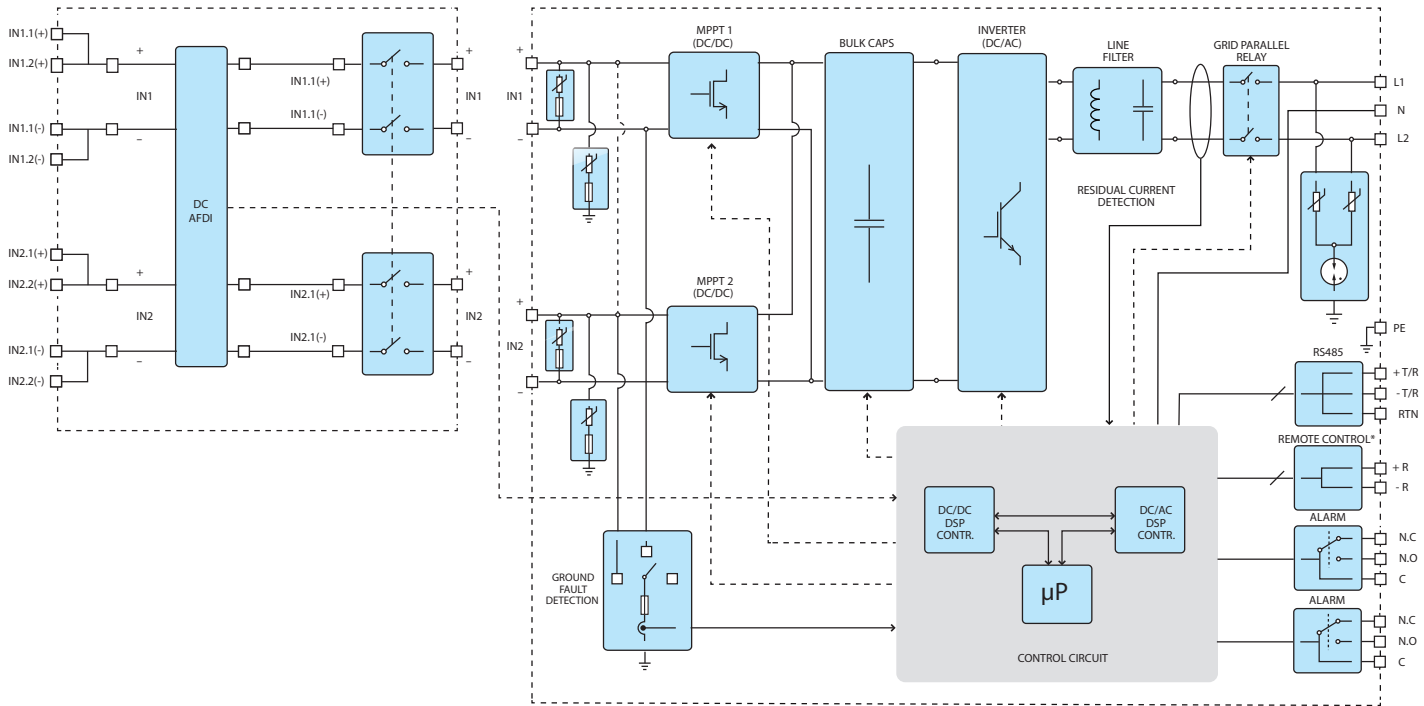

## Technical data and types

### Type code

UNO-7.6-I-OUTD-S-US

UNO-8.6-I-OUTD-S-US

### Mechanical specifications

Enclosure rating

NEMA 4X

Cooling

Natural convection

Dimensions (H x W x D)

18.9 x 22.8 x 8.8 in (480 x 583 x 223mm) Inverter only  
29.3 x 22.9 x 8.8 in (745 x 583 x 223mm) Including wiring box

Weight

81.5lb (37kg)

Shipping weight

103.5lb (47kg)

Mounting system

Wall bracket

Conduit connections

Bottom: (2) plugged 1/2" openings, (2) plugged 1" openings, (2) Concentrik KOs 3/4", 1"  
Sides: (2) Concentrik KOs 3/4", 1"

DC switch rating (per contact) (A/V)

25A / 600Vdc

### Safety

Isolation level

Transformerless - floating array

Safety and EMC standard

UL 1741, IEE1547, IEE1547.1, CSA-C22.2N. 107.1-01, UL1998 UL1699B, FCC Part 15

Safety Approval

Class B

### Warranty

Standard warranty

10 years

Extended warranty

15 & 20 years

### Available models

With DC switch and wiring box

UNO-7.6-TL-OUTD-S-US-A

UNO-8.6-TL-OUTD-S-US-A

\*All data is subject to change without notice



### Support and service

ABB supports its customers with a dedicated, global service organization in more than 60 countries, with strong regional and national technical partner networks providing a complete range of life cycle services.

For more information please contact your local ABB representative or visit:

**[www.abb.com/solarinverters](http://www.abb.com/solarinverters)**

**[www.abb.com](http://www.abb.com)**

© Copyright 2014 ABB. All rights reserved. Specifications subject to change without notice.



9AKK106103A4868 REV 1.6 EN 05.16.2014 #16634

Power and productivity  
for a better world™

